
SHAPING THE FUTURE OF ILLIAD ADDONS BETTER, FASTER, STRONGER



Matt Calsada



THE SECOND ONE

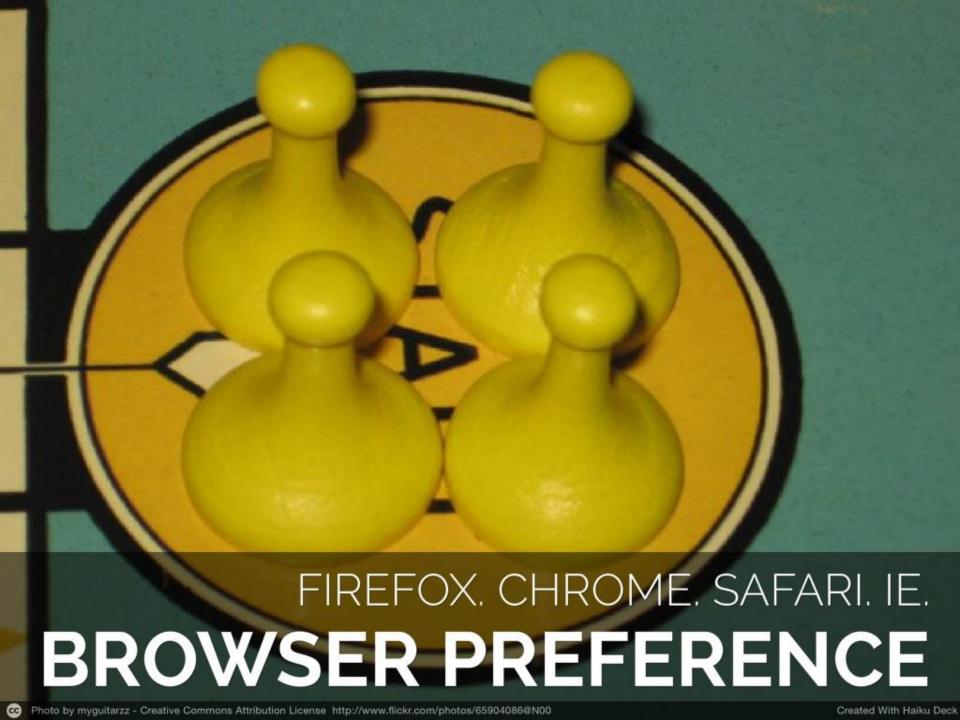

ad 8.5 added the ability to use custom flags. Flags can be used in both Client and Server addons.

iad Client Addons

ding a Transaction Flag

s a flag to a request. A CustomFlag with the specified flag name must already exist when used in the addon. If a corresponding flag is not found, it will r added to the request. Flags that are defined internally by the system cannot be added. Available in the following addon types:

- System
- Addon
 - FormUser
 - FormMain
 - FormRequest

ameters

- TransactionNumber: The transaction number to add the flag to (optional when this command is used in a FormRequest addon).
- FlagName: The name of the flag to be added to the request

mple

following is an example of the syntax used in a SystemManager addon that will add a transaction flag to the ILLiad request with TransactionNumber 12 flag that will be added to the request is "Expedite Request."

```
xecuteCommand("AddTransactionFlag", { 1234, "Expedite Request" });
```

FormRequest addon:

xecuBillinard ("Ader Raci GRA Extal Aduest SLOW!

ABCDEF GHIJKLM NOPORS TUVWXYZ Alphaber II ABC DE FEHIJIKLM NO POR STUVW XYZ

Zur Beachtung!

- 1 Enigma-Uhr rechts am Kasten der Enigma einhangen.
- Steckerverbindungen herstellen, dabei 1a und 1b gleich. 1 Stackerverbindung.
- 3 Rehanfolge 1a-1b, 2a-2b bis 10a-10b einhalten und nach den Schlüsselunterlagen von links nach rechts stecken.

ENCRYPTION

WHY? HOW? WHEN?



.NET ASSEMBLIES






PANEL

THE BAD NEWS.



ANTOINE DE SAINT-EXUPERY

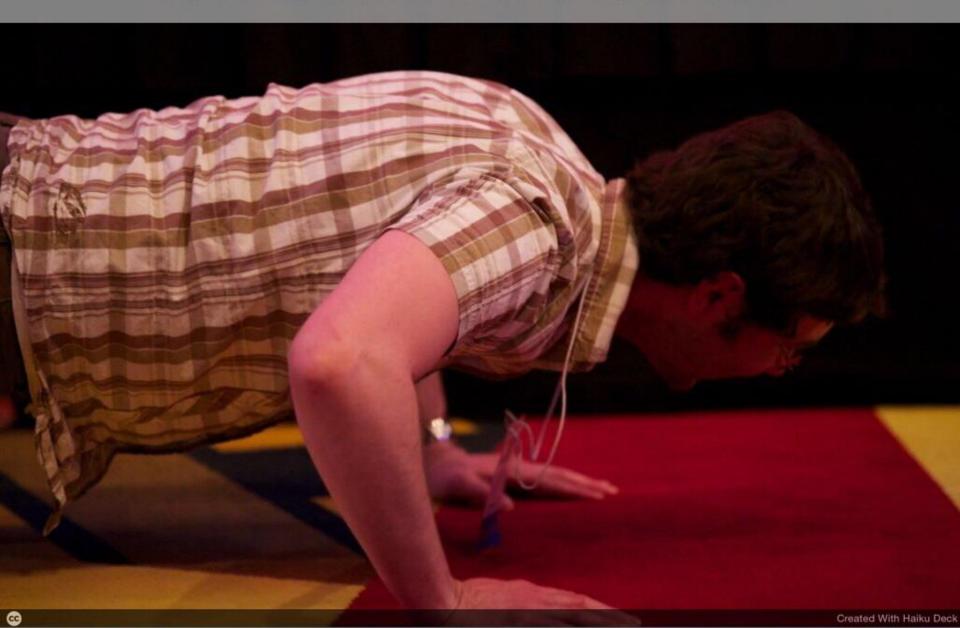

CONFUSED.



